



Centalic Series-P100

Probe 針

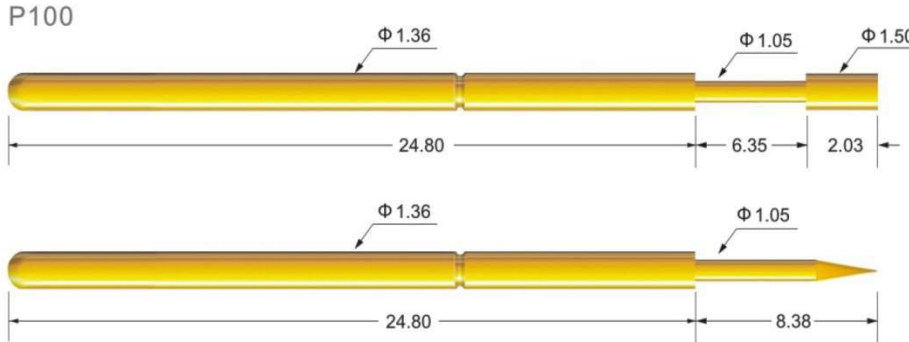

Receptacle 針套

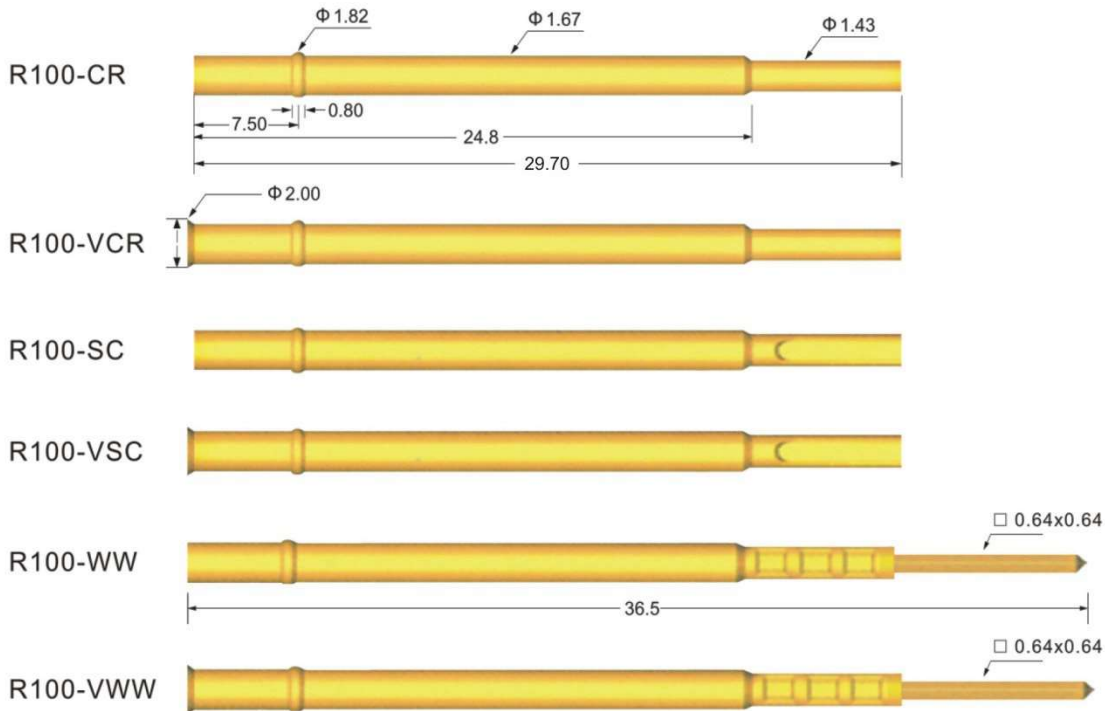

Technical Specifications

Recommended	
Minimum Center	2.54mm(100mil)
Current Rating	3amps, continuous
Contact Resistance	50milliohms
Mounting Hole Size	Φ 1.75mm
Full Stroke	6.35mm
Rated Stroke	4.32mm
Spring Force	113/198/255/285gf(4.0/7.0/9.0/10.0 oz)

Materials

Receptacle	Brass, Gold Plated
Contact Barrel	Brass, Gold Plated
Spring	Music Wire, Gold Plated
Plunger	BeCu/Sk4, Nickel Plated or Gold Plated

技術規格簡介


建議採用的	
最小值中心距	2.54mm(100mil)
額定電流	3安培, 連續
額定電阻	50 毫歐姆
安裝孔徑	Φ 1.75mm
滿衝程	6.35mm
額定衝程	4.32mm
額定彈力	113/198/255/285gf(4.0/7.0/9.0/10.0 oz)

材 料


接觸套	黃銅, 鍍金
接觸筒	黃銅, 鍍金
彈 簧	琴綫, 鍍金
針 杆	鍍銅/工具鋼, 鍍鎳或鍍金

Test Centers-100mil (2.54mm)
測試中心距-100mil (2.54mm)


Tip Styles 針頭類型




P100-T20




P100-V20




P100-D20




P100-D25




P100-D35




P100-D40




P100-E20




P100-E25




P100-E35




P100-E40




P100-H20




P100-H25




P100-H35




P100-H40




P100-K20




P100-K25




P100-K35




P100-K40




P100-V3




P100-X20




P100-W




P100-W15



P100-W20




P100-F40




P100-H21




P100-KB




P100-V13



P100-Z15



P100-U9




P100-J9

How To Order: Spring Contact Probe				Receptacle	
P100	F	4	G	R100	CR
Series	Tip Style	Spring Force (oz)	Plating Options [G- Gold Plated]	Series	Terminations
Series : P100	Tip Style : B,G,C,J	Spring Force: 4oz		Terminations: CR	

如何訂購: 彈弓測試針				針套	
P100	F	4	G	R100	CR
系列	針頭類型	彈力 (oz)	電鍍 (G-鍍金)	系列	接線端
系列: P100	頭型: B,G,C,J	彈力: 4oz		接線端: CR	

Test Centers-100mil (2.54mm)
測試中心距-100mil (2.54mm)

Tip Styles 針頭類型

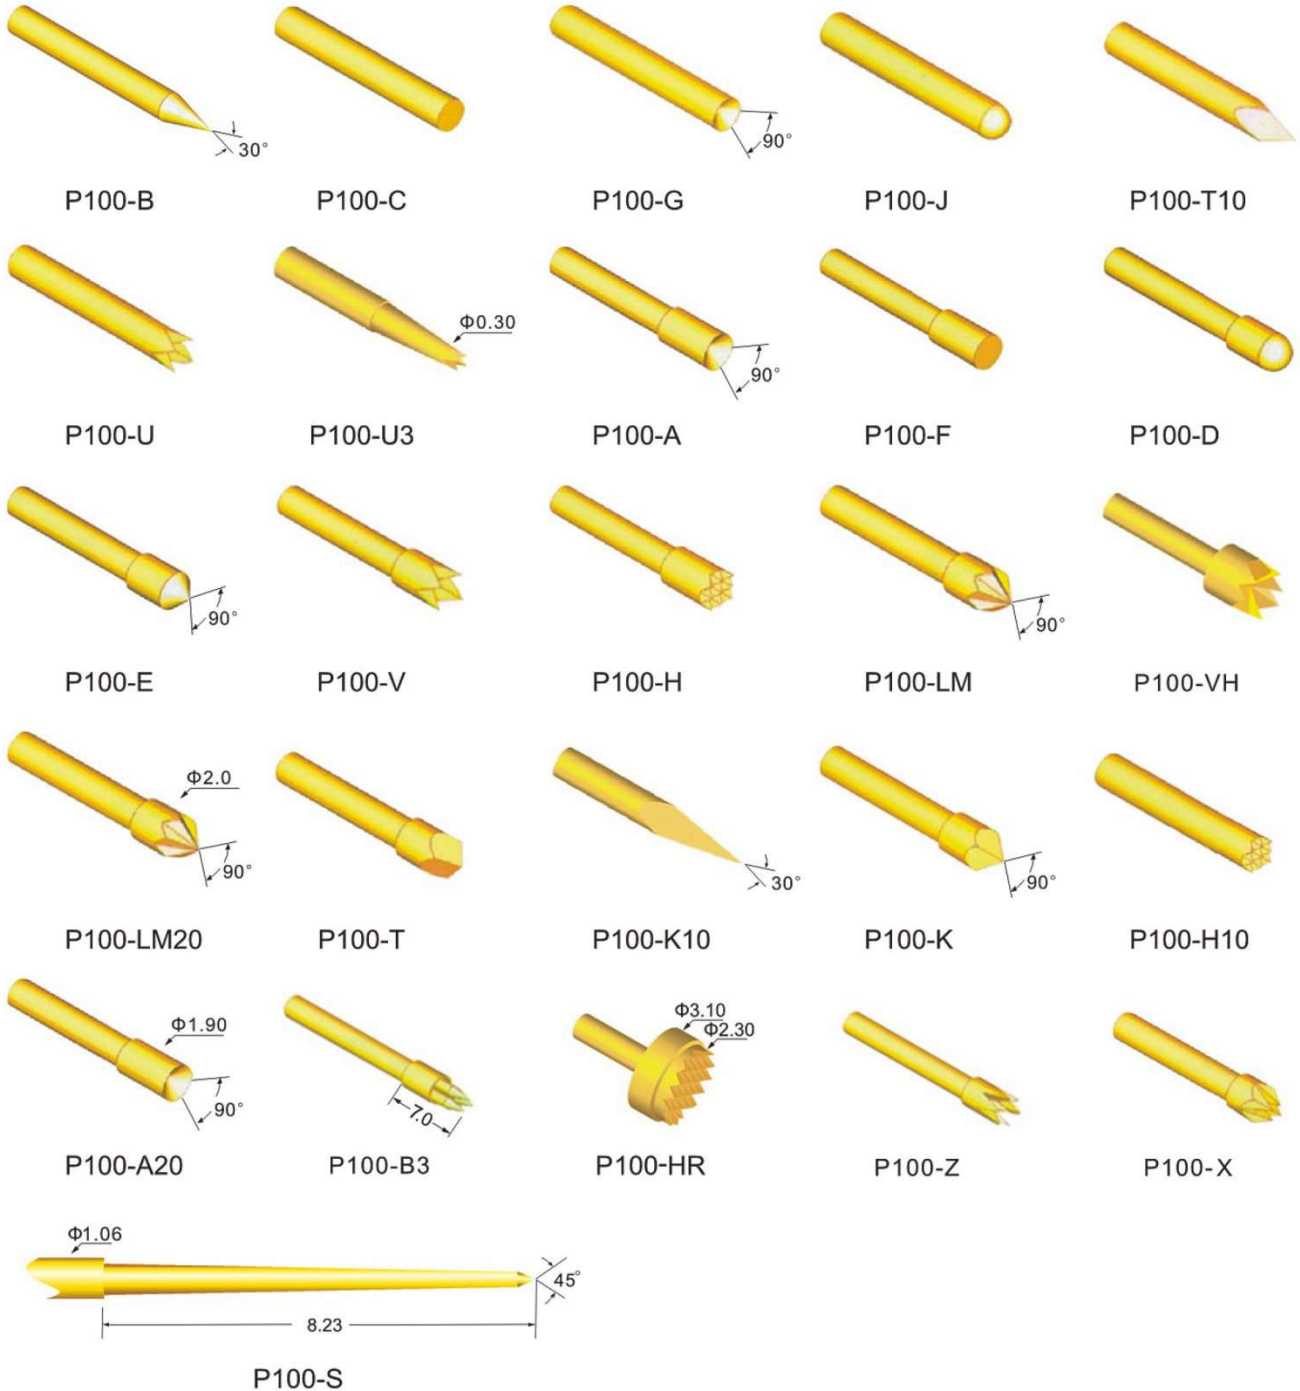

How To Order: Spring Contact Probe				Receptacle	
P100	F	4	G	R100	CR
Series	Tip Style	Spring Force (oz)	Plating Options [G- Gold Plated]	Series	Terminations
Series : P100	Tip Style : B,G,C,J	Spring Force: 4oz		Terminations: CR	

如何訂購：彈弓測試針					針套	
P100	F	4	G	R100	CR	
系列	針頭類型	彈力 (oz)	電鍍 (G-鍍金)	系列	接線端	
系列: P100	頭型: B,G,C,J	彈力: 4oz		接線端: CR		