



# Centalic Series-P125

## Probe 針

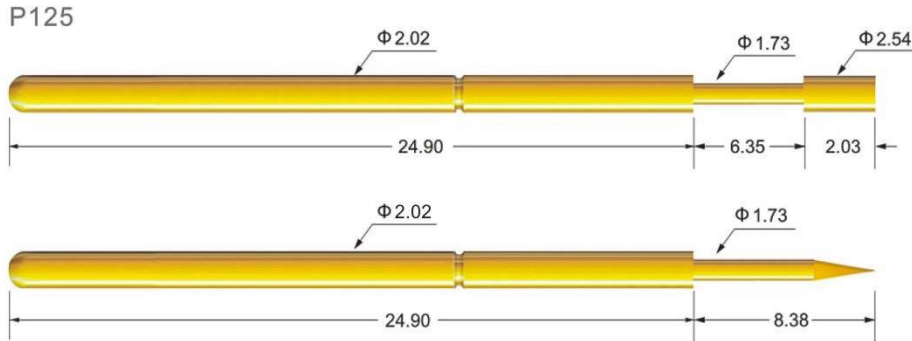

## Receptacle 針套

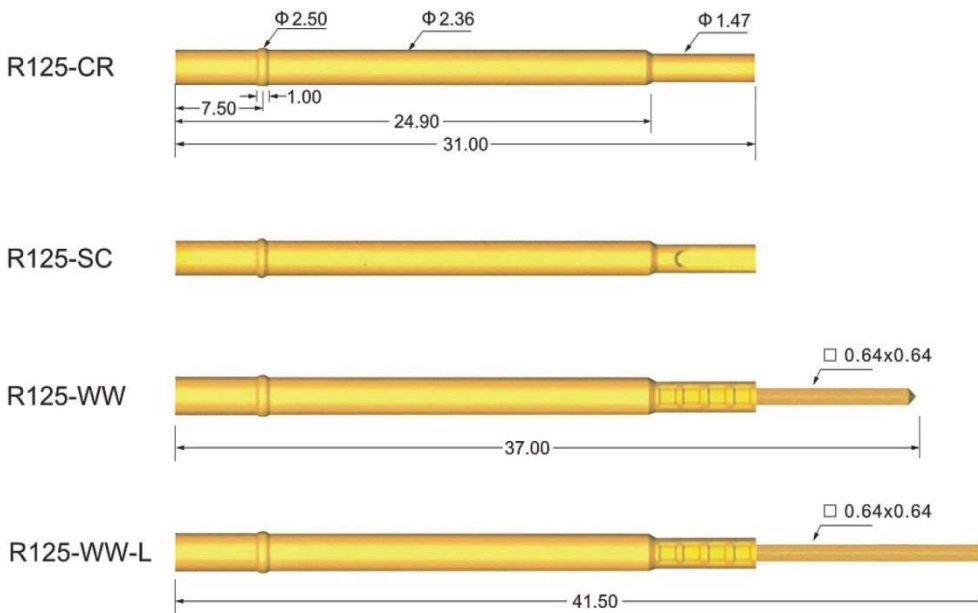

### Technical Specifications

Recommended	
Minimum Center	3.18mm(125mil)
Current Rating	3amps, continuous
Contact Resistance	30milliohms
Mounting Hole Size	Φ 2.40mm
Full Stroke	6.35mm
Rated Stroke	4.32mm
Spring Force	113/198/255/285gf(4.0/7.0/9.0/10.0 oz)

### Materials

Receptacle	Bronze, Gold Plated
Contact Barrel	Bronze, Gold Plated
Spring	Music Wire, Gold Plated
Plunger	BeCu, Nickel Plated or Gold Plated

### 技術規格簡介


建議採用的	
最小值中心距	3.18mm(125mil)
額定電流	3安培, 連續
額定電阻	30 毫歐姆
安裝孔徑	Φ 2.40mm
滿衝程	6.35mm
額定衝程	4.32mm
額定彈力	113/198/255/285gf(4.0/7.0/9.0/10.0 oz)

### 材 料

接觸套	磷銅, 鍍金
接觸筒	磷銅, 鍍金
彈 簧	琴綫, 鍍金
針 杆	鍍銅, 鍍鎳或鍍金

Test Centers-125mil (3.18mm)  
測試中心距-125mil (3.18mm)

## Tip Styles 針頭類型

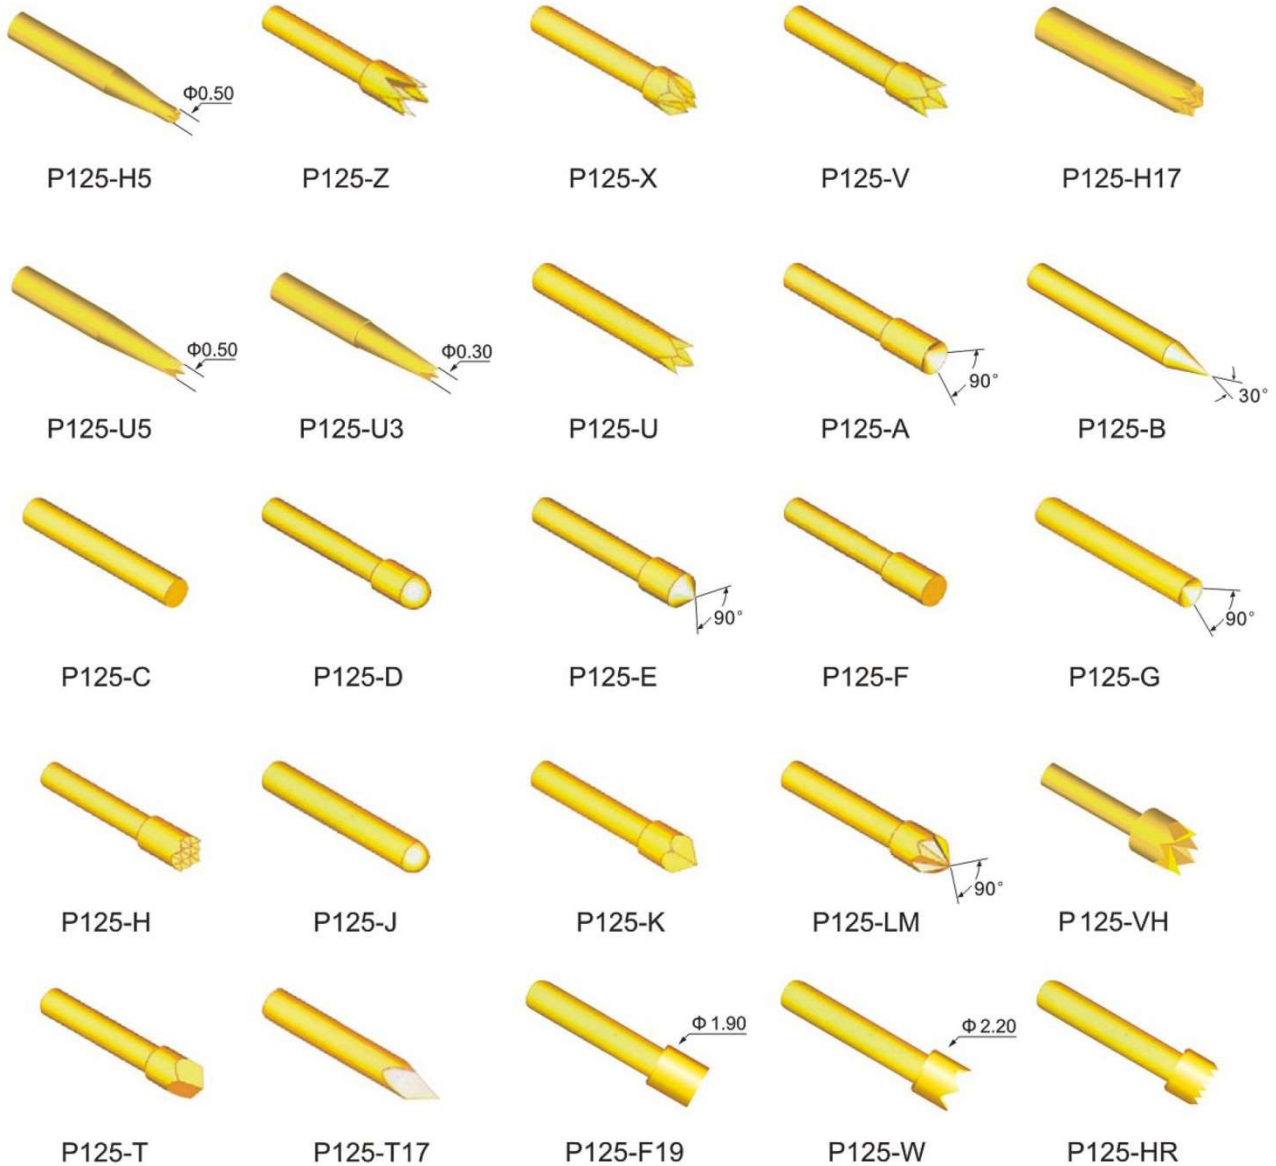

How To Order: Spring Contact Probe				Receptacle	
<b>P125</b>	<b>F</b>	<b>9</b>	<b>G</b>	<b>R125</b>	<b>WW</b>
Series	Tip Style	Spring Force (oz)	Plating Options [G- Gold Plated]	Series	Terminations
Series : P125	Tip Style : B,J,U5,U	Spring Force: 9oz		Terminations: WW	

如何訂購: 彈弓測試針				針套	
<b>P125</b>	<b>F</b>	<b>9</b>	<b>G</b>	<b>R125</b>	<b>WW</b>
系列	針頭類型	彈力 (oz)	電鍍 (G-鍍金)	系列	接線端
系列: P125	頭型: B,J,U5,U	彈力: 9oz		接線端: WW	