



Test Centers-100mil(2.54mm)
測試中心距-100mil(2.54mm)

Finished Product Style(成品針類型)

PE100-V-10G

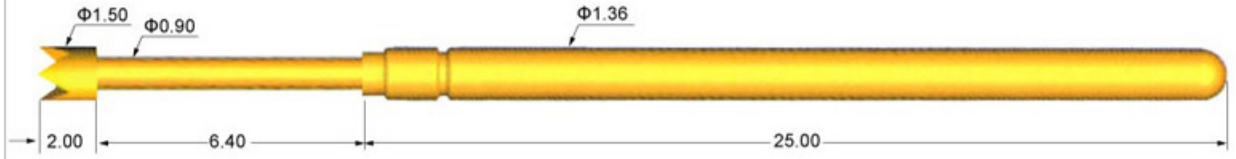

Finished Product Style(成品針類型)

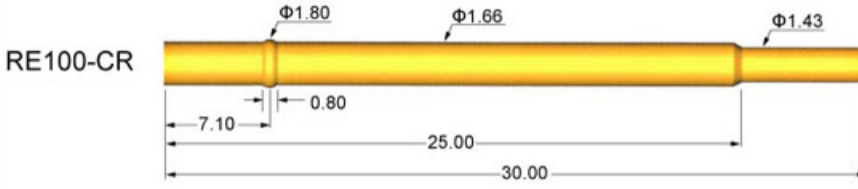

Technical Specifications

Recommended Minimum Center	:2.54mm(100mil)
Current Rating	:3amps, continuous
Contact Resistance	:30milliohms
Mounting Holes Size	:Φ1.75
Full Stroke	:6.40mm
Rated Stroke	:4.30mm
Spring Force	:156/203/255/284/312gf(5.5/7.2/9/10/11 oz)

技術規格簡介

建議採用的最小值中心距	:2.54mm(100mil)
額定電流	:3安培, 連續
額定電阻	:30毫歐姆
安裝孔徑	:Φ1.75
滿衝程	:6.40mm
額定衝程	:4.30mm
額定彈力	:156/203/255/284/312gf(5.5/7.2/9/10/11 oz)

Materials

Receptacle	:Brass, Gold Plated
Contact Barrel	:Brass, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated to Gold Plated

材 料

接觸套	: 黃銅, 鍍金
接觸筒	: 黃銅, 鍍金
彈 簧	: 琴綫, 鍍金
杆 身	: 鈹銅或鋼, 鍍鎳或鍍金

Tip Style(針頭類型)



How To Order: Spring Contact Probe				Receptacle	
PE100	V	10	G	RE100	WW
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations
Series: PE100 Tip Style: B, K9, J, U5, U, IT Spring Force: 10 oz				Terminations: WW	

如何訂購: 彈弓測試針				針套	
PE100	V	10	G	RE100	WW
系列	針頭類型	彈力(oz)	電鍍 (G-鍍金)	系列	接線端
系列: PE100 頭型: B, K9, J, U5, U, IT 彈力: 10 oz				接線端: WW	

Centalic Series-PE100