



Finished Product Style(成品針類型)

PE50-H-5G

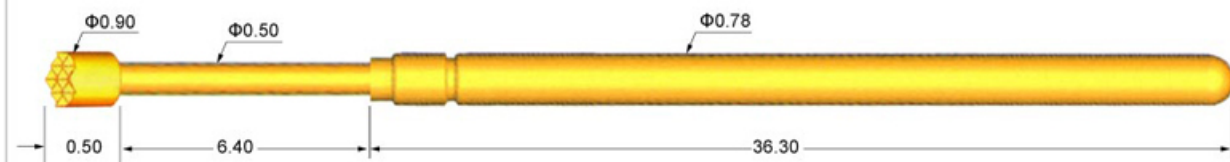

Finished Product Style(成品針類型)

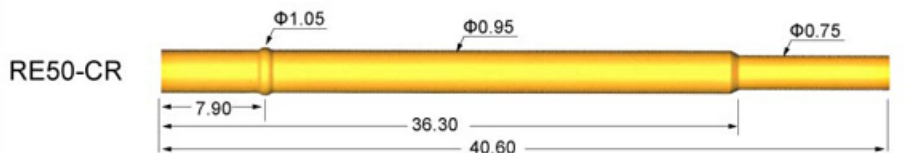

Centalic Series-PE50

Technical Specifications

Recommended Minimum Center	:1.27mm(50mil)
Current Rating	:3amps, continuous
Contact Resistance	:50milliohms
Mounting Holes Size	:Φ1.0
Full Stroke	:6.40mm
Rated Stroke	:4.30mm
Spring Force	:150gf(5 oz)

技術規格簡介

建議採用的最小值中心距	:1.27mm(50mil)
額定電流	:3安培, 連續
額定電阻	:50毫歐姆
安裝孔徑	:Φ1.0
滿衝程	:6.40mm
額定衝程	:4.30mm
額定彈力	:150gf(5 oz)

Materials

Receptacle	:Bronze, Gold Plated
Contact Barrel	:Bronze, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated or Gold Plated

材 料

接觸套	: 磷銅, 鍍金
接觸筒	: 磷銅, 鍍金
彈 簧	: 琴線, 鍍金
杆 身	: 鈹銅或鋼, 鍍鎳或鍍金

Tip Style(針頭類型)




PE50-B



PE50-K5



PE50-G



PE50-J



PE50-F



PE50-T5




PE50-U



PE50-C




PE50-H



PE50-CU



PE50-BK



PE50-H5



PE50-IT



PE50-S5



PE50-S

How To Order: Spring Contact Probe

PE50	H	5	G	RE50	CRW
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations
Series: PE50 Tip Style: B, K5, J, U3, U, IT Spring Force: 5 oz				Terminations: CRW	

如何訂購: 彈弓測試針

PE50	H	5	G	RE50	CRW
系列	針頭類型	彈力(oz)	電鍍 (G-鍍金)	系列	接線端
系列: PE50 類型: B, K5, J, U3, U, IT 彈力: 5 oz				接線端: CRW	