



Finished Product Style(成品針類型)

PE75-V-7.2G

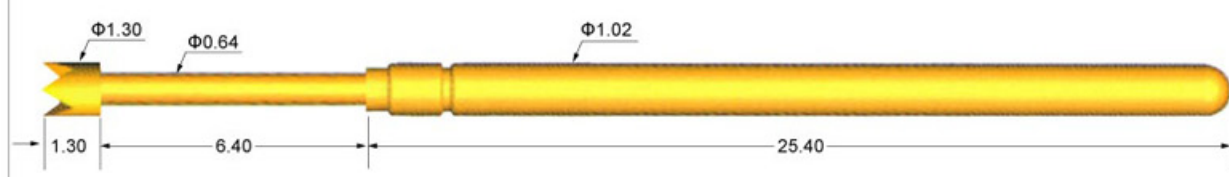

Finished Product Style(成品針類型)

RE75-CR

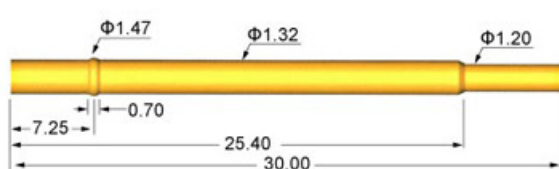

RE75-SC



RE75-WW



RE75-CR15



RE75-SC15



RE75-WW15



Technical Specifications

Recommended Minimum Center	:1.91mm(75mil)
Current Rating	:3amps, continuous
Contact Resistance	:30milliohms
Mounting Holes Size	:Φ1.35
Full Stroke	:6.40mm
Rated Stroke	:4.26mm
Spring Force	:203gf(7.2 oz)/227gf(8 oz)

技術規格簡介

建議採用的最小值中心距	:1.91mm(75mil)
額定電流	:3安培, 連續
額定電阻	:30毫歐姆
安裝孔徑	:Φ1.35
滿衝程	:6.40mm
額定衝程	:4.26mm
額定彈力	:203gf(7.2 oz)/227gf(8 oz)

Materials

Receptacle	:Brass, Gold Plated
Contact Bronze	:Brass, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated or Gold Plated

材 料

接觸套	: 黃銅, 鍍金
接觸筒	: 磷銅, 鍍金
彈 簧	: 琴線, 鍍金
杆 身	: 鍍銅或鋼, 鍍鎳或鍍金

Tip Style(針頭類型)



How To Order: Spring Contact Probe

PE75	V	7.2	G	RE75	WW
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations
Series: PE75 Tip Style: B, K6, J, U5, U, IT Spring Force: 7.2 oz				Terminations: WW	

如何訂購: 彈弓測試針

PE75	V	7.2	G	RE75	WW
系列	針頭類型	彈力(oz)	電鍍 (G-鍍金)	系列	接線端
系列: PE75 類型: B, K6, J, U5, U, IT 彈力: 7.2 oz				接線端: WW	