



Finished Product Style(成品針類型)

PQ75-V-7G

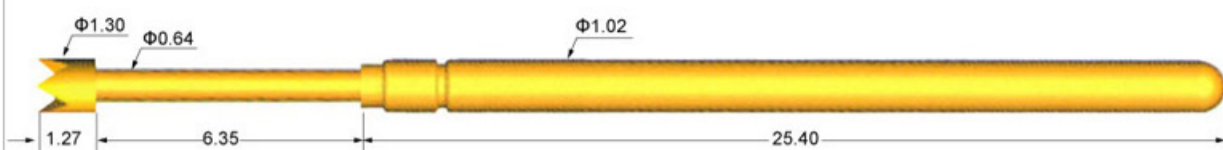


Finished Product Style(成品針類型)


RQ75-CR

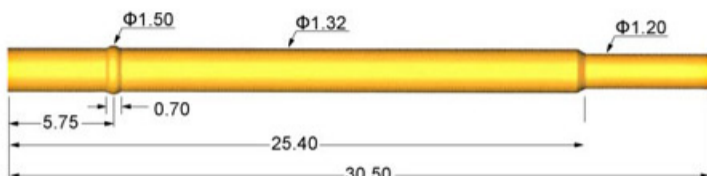

RQ75-SC



RQ75-WW



Technical Specifications

Recommended Minimum Center	:1.91(75mil)
Current Rating	:3amps, continuous
Contact Resistance	:30milliohms
Mounting Holes Size	:Φ1.35
Full Stroke	:6.35mm
Rated Stroke	:4.23mm
Spring Force	:198gf(7 oz)

技術規格簡介

建議採用的最小值中心距	:1.91mm(75mil)
額定電流	:3安培, 連續
額定電阻	:30毫歐姆
安裝孔徑	:Φ1.35
滿衝程	:6.35mm
額定衝程	:4.23mm
額定彈力	:198gf(7 oz)


Materials

Receptacle	:Brass, Gold Plated
Contact Barrel	:Bronze, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated to Gold Plated

材 料

接觸套	: 黃銅, 鍍金
接觸筒	: 磷銅, 鍍金
彈 簧	: 琴綫, 鍍金
杆 身	: 鈹銅或鋼, 鍍金

Tip Style(針頭類型)

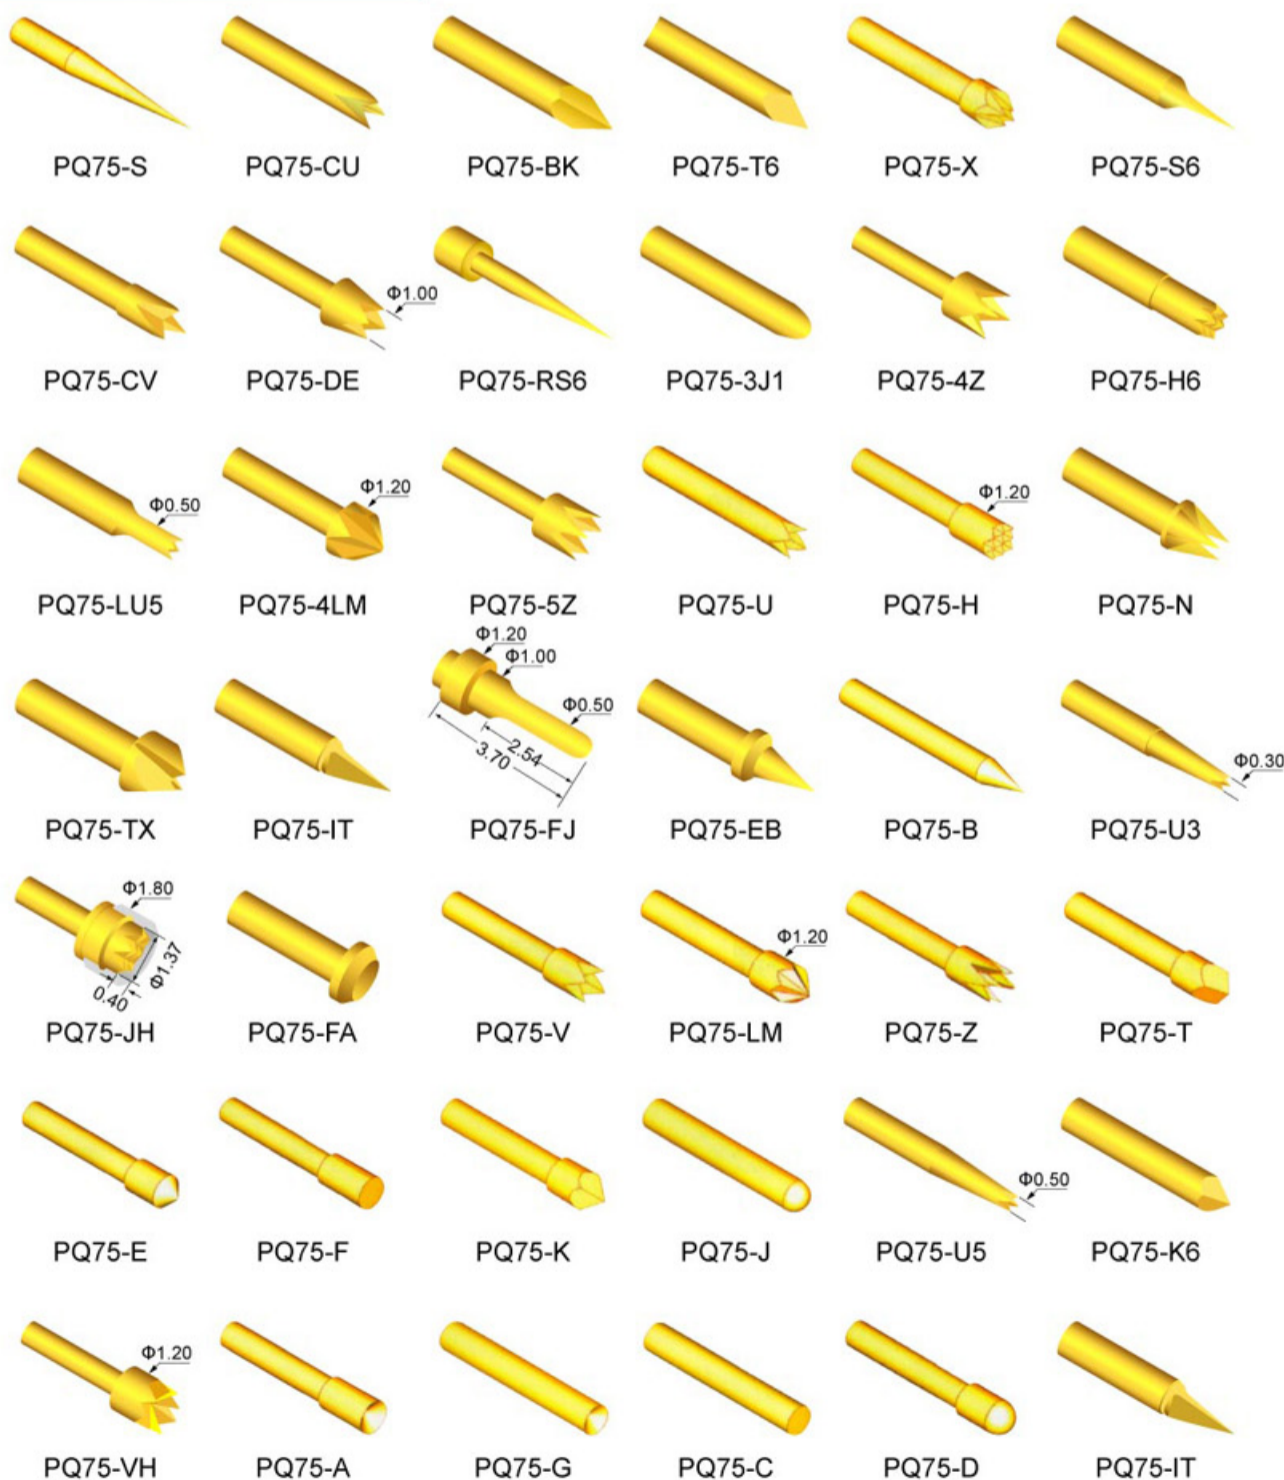

How To Order: Spring Contact Probe				Receptacle	
PQ75	V	7	G	RQ75	WW
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]	Series	Terminations
Series: PQ75 Tip Style: V, K6, J, U5, A, IT Spring Force: 7 oz				Terminations: WW	

如何訂購: 彈弓測試針				針套	
PQ75	V	7	G	RQ75	WW
系列	針頭類型	彈力(oz)	電鍍 (G-鍍金)	系列	接線端
系列: PQ75 頭型: V, K6, J, U5, A, IT 彈力: 7 oz				接線端: WW	