

Finished Product Style(成品針類型)

PQL50-H-7G



Technical Specifications

Recommended Minimum Center	:1.27(50mil)
Current Rating	:3amps, continuous
Contact Resistance	:50milliohms
Full Stroke	:6.35mm
Rated Stroke	:4.30mm
Spring Force	:185/227gf(7/8 oz)

技術規格簡介

建議採用的最小值中心距	:1.27mm(50mil)
額定電流	:3安培, 連續
額定電阻	:50毫歐姆
滿衝程	:6.35mm
額定衝程	:4.30mm
額定彈力	:185/227gf(7/8 oz)


Materials

Contact Barrel	:Bronze, Gold Plated
Spring	:Music Wire, Gold Plated
Plunger	:BeCu or Steel, Rhodium Plated to Gold Plated

材 料

接觸筒	: 磷銅, 鍍金
彈 簧	: 琴綫, 鍍金
杆 身	: 鈹銅或鋼, 鍍鎳或鍍金

Tip Style(針頭類型)

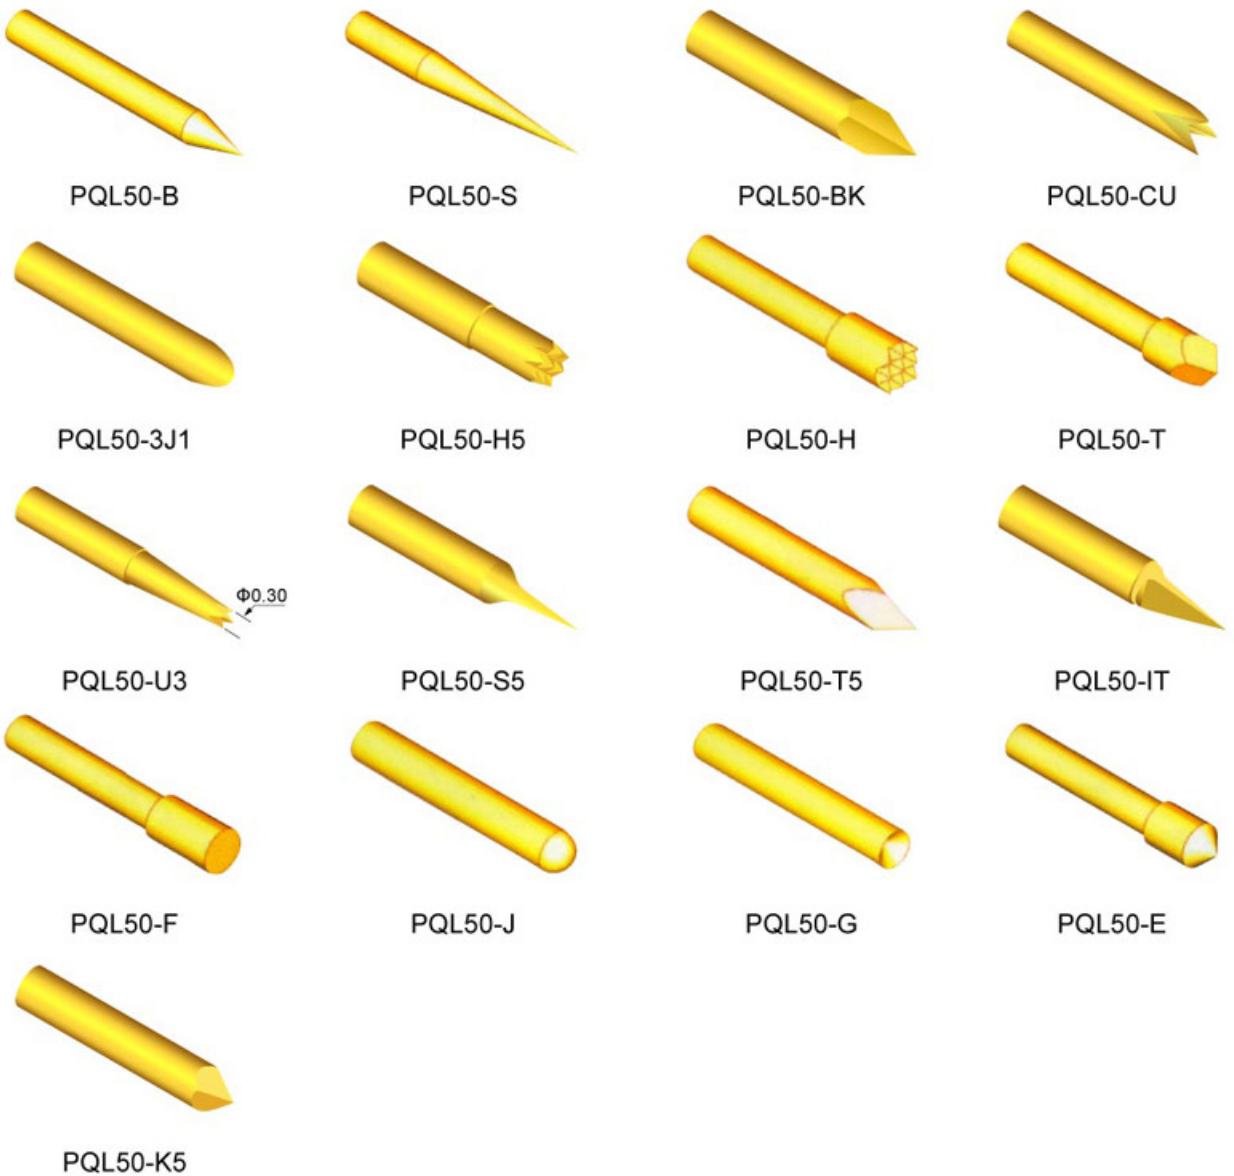

How To Order: Spring Contact Probe

PQL50	H	7	G
Series	Tip Style	Spring Force (oz)	Plating Options [G-Gold Plated]

Series: PQL50  
Tip Style: B, K5, J, U3, U, IT  
Spring Force: 7 oz

如何訂購: 彈弓測試針

PQL50	H	7	G
系列	針頭類型	彈力(oz)	電鍍 (G-鍍金)

系列: PQL50  
頭型: B, K5, J, U3, U, IT  
彈力: 7 oz